


www.circlesafety.com



**CIRCLES
SAFETY**

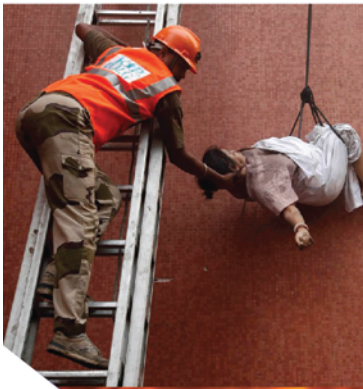

Manufacturer & Authorized Dealers for Fire Extinguishers, Safety Equipments, Hydrant accessories, Surgical & Disposable items, Weldign Items, Housekeeping Products, Safety Hand Gloves, Cotton Lab Coats & Aprons, PVC Products, Reflective Jackets & Reflectives Boards, Road Safety Products, Safety Goggles, Safety Helmets, CCTV Cameras & Security Products, Industrial Machinery products, Chemical Resistance Gloves, Refilling & Spares



+91 89391 44333 / 89396 65656
admin@circlessafety.com www.circlessafety.com



SERVICES : CHENNAI | COIMBATORE | VELLORE | NEYVELI | KARAIKAL | BANGALORE



3M 9004



Dust Respirator

3M 8710



Dust/Mist Respirator

3M 9913



Dust/Mist/OV
Respirator

3M 8210



N95 Welding
Respirator

3M 8246



Acid Gas Relief
Respirator

3M 8822



FFP2 Welding
Respirator

3M 8511



N95 Respirator

**3M 3200/
3011-55**



Single Cartridge
Half Face Respirator

3M 6200



Twin Cartridge half face
piece Respirator

3M 7502



Twin Cartridge silicon
half face piece Respirator

3M 6800



Full face
piece respirator

3M 6001



OV Cartridge

3M 6002



Acid gas cartridge

3M 6003



OV / Acid
gas cartridge

3M 6004



Ammonia /
Methylamine
cartridge

3M 6005



Formaldehyde / OV
Cartridge

3M 6006



Multi-Gas / Vapour
Cartridge

3M 6009



Mercury / Chlorine
Cartridge

3M 7093



P100 Filter

3M 2091



P100 Particulate Filter

3M 501 / 5N11



Filter Retainer/
Pre-Filter

3M 1110



Corded Earplug

3M 1270



Reusable Ear Plug

Ear Plug with Dispenser 1425



Ear - Superfit Ear
Uncorded



Neckband Ear Muff
H6B/V



H7A/H7P3E



H7A Push to listen



Electronic Ear Muffs

3M Virtua



Feel as Great
as it protects

3M Maxim



DX Coated Lens

3M 1710



Nassau Rave

3M Tour Guard



Visitor Glass

3M 1620 / 1621



Chemical Splash
Guard goggles

3M 2790



Chemical Splash
antifog Goggles

Light Vision



Dual Hands free
temple Lighting

3M 9002D



Welding Shield
Shade 9&11

3M 9002X



Welding Shield
Shade 9&13

3M ADFLO



Welding Shield
with PAPR

Fresh Air 'C'



Welding Shield
Air line System

100 V



Welding Shield

3M 8906



Hi-visibility
Reflective jacket

3M Aearo



Hardhat Helmet



<p>Nomex Suit</p>  <p>Fire Proximity Suit</p>	<p>Aluminised Suit</p>  <p>Fire Proximity Suit</p>	<p>Air Supplied Suits</p>  <p>Air Supplied Suit</p>	<p>Tyvek Suits</p>  <p>for Dust</p>	<p>Tychem-F&C</p>  <p>Organic & in-Organic Vapours</p>	<p>Diving Suit</p>  <p>Lady Man</p>	<p>3M Thinsulate</p>  <p>Cold Storage Suit</p>
<p>Gas Tight Suit</p>  <p>Gas Tight Suit</p>	<p>Gas Tight Suit</p>  <p>Gas Tight Suit</p>	<p>Contamination Suit</p>  <p>Contamination Suit</p>	<p>Suit with PAPP</p>  <p>Suit with PAPP</p>	<p>Nuclear Pharma Suit</p>  <p>Nuclear Pharma Suit</p>	<p>Air Line Hood</p>  <p>Air Line Hood</p>	<p>Protective Suit Kool Vest</p>  <p>Protective Suit Kool Vest</p>
<p>Insulated Tools</p>  <p>Insulated Tools</p>	<p>ARC Flash Suit</p>  <p>ARC Flash Suit</p>	<p>ARC Flash Suit</p>  <p>ARC Flash Suit</p>	<p>Over All</p>  <p>Over All</p>	<p>Duck Back rain Coat</p>  <p>Duck Back rain Coat</p>	<p>Rain Coat</p>  <p>Rain Coat</p>	<p>Rain Coat Pant & Shirt</p>  <p>Rain Coat Pant & Shirt</p>
<p>Cotton Knitted Gloves</p>  <p>Cotton Knitted Gloves</p>	<p>Nitrile Coated</p>  <p>Latex Coated</p>	<p>Nylon Knitted Gloves</p>  <p>Low Lint</p>	<p>Kevlar Knitted Gloves</p>  <p>Heat Protection</p>	<p>Leather Welding Glove</p>  <p>Leather Welding Glove</p>	<p>Chrome Canadian Glove with Reinforcement on Palm</p>  <p>Chrome Canadian Glove with Reinforcement on Palm</p>	<p>Rubber Gloves</p>  <p>Rubber Gloves</p>
<p>PVC Gloves</p>  <p>PVC Gloves</p>	<p>Nitrile Gloves</p>  <p>Nitrile Gloves</p>	<p>Thin Nitrile Gloves</p>  <p>Thin Nitrile Gloves</p>	<p>Neoprene Gloves</p>  <p>Neoprene Gloves</p>	<p>Bi Colour Gloves</p>  <p>Bi Colour Gloves</p>	<p>Work Gloves</p>  <p>Work Gloves</p>	<p>PU Coated Gloves</p>  <p>PU Coated Gloves</p>
<p>Surgical Gloves</p>  <p>Surgical Gloves</p>	<p>Kevlar Gloves</p>  <p>Heat Protection</p>	<p>Cut Resistant Gloves</p>  <p>Dyneema</p>	<p>Metal Mesh Gloves</p>  <p>Cut Resistant</p>	<p>Fireman Gloves</p>  <p>Fireman Gloves</p>	<p>Cryogenic</p>  <p>Upto minus 170°C Temperature</p>	<p>Cold Storage/Tempshield Cryogenic Gloves</p>  <p>Upto minus 18°C & 7°C Temperature</p>



Velvet Shock



Vibration

Electrosoft



Electrical & Over Gloves

Dry Box Gauntlets



Kerodex



The wonder barrier cream that works hard to protect Hardworking hands

Hand Cleaning Gel



D - Lead



Lead Protection

D - Wipe



Lead Protection

Vanguard and Ventilated Helmet



Load Carrying Helmets



Helmet with Light



Fireman Helmet



CE Marked Visor



Face Shield

Bump Cap



Cap for Emergency Rescue Team



Stealthlite 2450



Intrinsically safe Rechargeable Flash Light

BIG ED 3750



Intrinsically safe Rechargeable Flash Light

Head Light



Intrinsically safe Rechargeable Flash Light

Remote Lighting System



Emergency Flood Light

LED Exit Lights



Emergency Lights



Signages



Directions

Signages



Prohibitions

Signages



Mandatory

Signages



Warning

Glow Tapes



Safety Posters



Escape route Plan



ESD Gloves



ESD - Finger Cots



ESD - Shoe Cover



ESD - Shoe / Chappals



ESD Coat



ESD Suits



ESD Aisle Marking Tapes




Welding Helmet



Welding Hand Shield A-Type

Welding Curtains



Non Folding PVC Curtain

Cylinder Trolley



Fiber Glass Fabric & Welding Blankets



Flashback Arrestor (Welding)



Water Tight Protector Case



Small Cases (1400)

Medium Cases (1520)








<p>Type1</p>  <p>Blue can for Kerosene Yellow cans diesel/Fuel Green for Oils</p>	<p>Type2</p>  <p>Safety cans for Flammable Liquids</p>	<p>Polythene can</p>  <p>Safety cans for Flammable Liquids</p>	<p>Safety Cans</p>  <p>for Corrosive / Flammable Liquids</p>	<p>HPLC Cans</p>  <p>for Laboratories</p>
---	--	--	--	---

<p>26806aa</p>  <p>Personnel Smokers Cease Fire</p>	<p>Dispenser for Hazardous Liquids</p>  <p>Plunger Cans</p>	<p>Steel Cabinets</p>  <p>Safety Cabinets for Flammable Liquids</p>	<p>Safety Cabinets</p>  <p>Blue Polythene Storage cabinets for Corrosive / Flammable Liquids</p>	<p>Spill control pallets</p>  <p>Pallet with Pallet ramp</p>
---	---	---	---	--

<p>Gas Alert Extreme Single gas Detectors</p>  <p>GasAlert H₂S, CO, O₂ or SO₂</p>	<p>Gas alert Micro Clip Multi-gas Detectors</p>  <p>H₂S, CO, O₂ or SO₂ or Combustibles</p>	<p>Gas alert Max - XT Multi - Gas Detector with pump</p>  <p>%LEL, O₂, H₂S, CO</p>	<p>Gas Alert Micro 5 PID Five GAs Detector</p>  <p>VOCs(PID), H₂S, CO < O₂, SO₂, PH₃, Cl₂, NH₃, NO₂, HCN, EtO, ClO₂, O₃, No and Combustibles</p>	<p>Sampler Pack</p>  <p>External Motorized Sampling Pump</p>	<p>Micro Dock 2</p>  <p>Sense Pointpro</p>	<p>LPG gas Monitoring System</p> 
---	---	--	--	--	--	---

<p>Low Ankle Safety Shoe</p>  <p>PVC Sole</p>	<p>Safety Shoe with Dual Density</p>  <p>PU Sole</p>	<p>Safety Shoe</p>  <p>Rambo Stallon (Ankle Height)</p>	<p>Ladies Safety Shoes</p>  <p>Allen Cooper AC-4003</p>	<p>Gumboots with Steel Toe</p>  <p>PVC / Rubber</p>	<p>Fireman Boot</p> 	<p>Di-electric HAZMAX Boot with Steel Toe</p> 
---	--	---	---	--	--	--

<p>First Aid Box</p> 	<p>Aluminum Foldable Stretcher</p>  <p>Ambulance Stretcher</p>	<p>Cervical Collar</p>  <p>Head immobilize</p>	<p>Rescue Stretcher</p> 	<p>Liftable Wheel Chair</p> 	<p>Evacuation Chair</p> 	<p>Artificial</p> 
---	--	--	---	--	--	--

<p>Safe Oxy Pac</p>  <p>Oxygen</p>	<p>OXY KIT</p>  <p>Oxygen</p>	<p>Waterjel Blankets</p> 	<p>Burn Dressings</p> 	<p>Burn Jel</p> 	<p>Fire Blanket</p> 	<p>smoke Escape Hood</p> 
--	---	---	--	---	--	---



Lock out Tag Out



MP Cable Lock out



Valve Lockouts



Ball Valve Lockout



Valve Lockouts



Circuit - Breaker L/O



Drum Lock outs



Electrical Lockout



Electrical / Circuit Breaker Lockout



Circuit Breaker L/O



Lockout Padlocks



Valve Lockout Kit



LOTO Starter Kit



Electrical Department Lockout Kit



Barricade



Retractable Cone



Multi Purpose Cone



Cone Accessories



Q - Post



Convex / Dome Mirrors



Reflective Jacket



Led Baton



Metal Detector



Door Frame Metal Detector



Speed Bumps



Parking Blocks



Bumpers



Wall Guards & Corner Guards



Lolar Road Stud



Solar Delineator



Floor Stand



Road Studs



Barricading Tapes




Barriers



Flexi Post



Barricading Net



Spark Arrester



Under Vehicle Mirror



Mega Phone



Safe Assembly Point



Traffic Signages



**FENZY AERIS**

Self Contained Open Circuit Breathing Apparatus

SCBA System

With Motion Alert & Digital Display

Escape BA set SCBA**Air Compressor**

Low Pressure Compressor



High Pressure Compressor

Smoke and fume exhausting blower**Chlorine Leak Arresting Kit****Lifebuoy****Life Jacket****Infrared Thermometer****LUX -Meter****Anemo Meter****Sound Level Meter****Breath Alcohol Analyzer****Eyewash Bottle****Portable Eye Wash****Eye wash Fountain****Eye wash Fountain with Shower****Decontamination Unit**

CESS 10

SIREN**Safety Knife****Rescue Tools**

Spreader

Rescue Tools

Cutter

Lifting Bags**Grinding Tools**

Safety Suitcase Solution

Grinding Welding Seam

Insulating Tools**Wind Sock****Snake Catcher****Registered Office :**

No 7, Nakkiran Street, Periyar nagar, Pallikaranai, Chennai - 600 100.

Landmark (Om Sakthi Temple) ☎ +91 89391 44333 / 89396 65656

✉ admin@circlessafety.com 🌐 www.circlessafety.com



SERVICES : CHENNAI COIMBATORE VELLORE NEYVELI KARAIKAL BANGALORE

MULTIPURPOSE POWDER BASED PORTABLE FIRE EXTINGUISHERS



TYPE 'A'
FOR USE ON PAPER,
WOOD, CLOTH,
PLASTICS ETC.

TYPE 'B'
FOR USE ON PETROL,
OIL PAINTS, SPIRIT,
CHEMICALS ETC.

TYPE 'C'
FOR USE ON COOKING
& WELDING GAS,
ELECTRICAL FIRE ETC.



IS:15683

CML : 7700044610

IS:15683

CML : 7700044610

TECHNICAL SPECIFICATION

Approval	ISI Marked as per IS 15683				
Type	Store Pressure				
Propellant	Nirtrogen / Co ₂				
Hydraulic Test Pressure	35 kgf / cm ²				
Service Pressure	15 kgf / cm ²				
Operating Temperature	-0°C to +55°C / -10°C to +55°C				
Min. Effective Discharge	85%				
Capacity	1 kg	2 kg	4 kg	6 kg	9 kg
Fire Rating	1A & 8B	1A & 13B	2A & 21B	3A & 34B	4A & 89B
Discharge Time	Min. 8 S	Min. 8 S	Min. 16 S	Min. 20 S	Min. 25 S
Discharge Range	2 Mtr.	3 Mtr.	4 Mtr.	6 Mtr.	7 Mtr.
Tare Weight	1 Kg.	2.3 Kg.	2.75 Kg.	3.3 Kg.	5.35 Kg.
Full Weight	2 Kg.	3.3 Kg.	6.75 Kg.	9.3 Kg.	14.35 Kg.

BC DRY POWDER CARTRIDGE



TYPE 'B'
FOR USE ON PETROL,
OIL PAINTS, SPIRIT,
CHEMICALS ETC.



TYPE 'C'
FOR USE ON COOKING
& WELDING GAS,
ELECTRICAL FIRE ETC.



TECHNICAL SPECIFICATION

Capacity	4	6	9
I.S. SPECIFICATION NUMBER	IS 15683	IS 15683	IS 15683
Fire Rating	34 B	34 B	89 B
CO2 Gas cartridge (gms.)	90	120	200
Complete weight (appr. kg.)	7.3	10.3	15.3
Empty Weight (appr. kg.)	3.0	4.0	6.3
Overall Height (mm)	410	412	515
Operating Temperature	-20°C to +55°C	-20°C to +55°C	-20°C to +55°C
Dia of Cylinder (mm)	140±10	150±10	180±10
Range of Discharge	2 Mtr	4 Mtr	6 Mtr
Duration of Discharge	13 sec	20 sec	25 sec
Test Pressure	35 Bar	35 Bar	35 Bar
Working Pressure	15 Bar	15 Bar	15 Bar
Burst Pressure	55 Bar	55 Bar	55 Bar
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR			
Approvals	BIS	BIS	BIS



MECHANICAL FOAM (AFFF) FIRE EXTINGUISHERS

(Cartridge Type / Stored Pressure)

TECHNICAL SPECIFICATION		
Capacity	9 Litre	50 Litre
Indian Standard	ISI Marked as per IS 15683	
Body	Mild Steel	
Type	Constant Pressure / Cartridge type	Co ₂ / Cartridge Type
Extinguishing Media	Aqueous Film Forming Foam (AFFF) As Per IS: 4989	
Propellant	Nitrogen/Co ₂	Co ₂
Hydraulic Test Pressure	35 kgf / cm ²	
Operating Temperature	+5°C to +55°C	
Min. Effective Discharge	More Than 90%	
Fire Rating	4A & 89B	
Discharge Time	Min. 13 S	Min. 120 S
Discharge Range	Min. 2 Mtr.	Min. 8 Mtr.



WATER Co2 FIRE EXTINGUISHERS

TECHNICAL SPECIFICATION		
Capacity	9 Litre	50 Litre
Indian Standard	ISI Marked as per IS 15683	
Body	Mild Steel	
Type	Constant Pressure / Cartridge type	Co ₂ / Cartridge Type
Extinguishing Media	Water	
Propellant	Nitrogen/Co ₂	Co ₂
Hydraulic Test Pressure	35 kgf / cm ²	
Operating Temperature	+5°C to +55°C	
Min. Effective Discharge	More Than 90%	
Fire Rating	4A	
Discharge Time	Min. 13 S	Min. 120 S
Discharge Range	Min. 2 Mtr.	Min. 8 Mtr.



WATER TYPE FIRE EXTINGUISHER

Capacity : 45 Ltr.

Capacity : 125 Ltr.

- ⊗ IS No. As per IS 16018
- ⊗ Jet Length (in mtrs) : 10 Mtrs
- ⊗ Discharge Percentage Min. : 98%
- ⊗ Discharge Time Min. : More than 60 sec
- ⊗ Charge Pressure : 14 Kgf / cm²
- ⊗ Extinguisher Media : Water
- ⊗ Expellant : Co₂



MECHANICAL FOAM TYPE FIRE EXTINGUISHER

Capacity : 45 Ltr.

Capacity : 125 Ltr.

- ⊗ IS No. As per IS 16018
- ⊗ Jet Length (in mtrs) : 10 Mtrs
- ⊗ Discharge Percentage Min. : 98%
- ⊗ Discharge Time Min. : More than 60 sec
- ⊗ Charge Pressure : 14 Kgf / cm²
- ⊗ Extinguisher Media : AFFF FOAM
- ⊗ Expellant : Co₂





FIRE FIGHTING ACCESSORIES

Automatic Modular ABC / BC / Clean Agent Fire Extinguishers (Stored Pressure)



ABC Powder / BC Powder / Clean Agent
Available in 2 Kg, 5 Kg, 10 Kg & 15 Kg
Available in Bulb Temperature : 56 - 107 Degrees

Co2 Gas Cartridge for Use in Fire Extinguishers



IS : 15683 : 2006



CML No. 2589173

Capacity (Kg)	20, 40, 60, 90, 120, 180, 200, 250 & 300 Gms.
Confirming IS Code	IS : 4947
Body Test BAR	250 BAR

SWINGING TYPE WALL MOUNTED FIRST AID HOSE REEL DRUM

TECHNICAL SPECIFICATIONS

Conforming to : IS:884/ 1958

Size: Inlet : 1" Threaded Inlet Connection

Type : Swinging 1800 Wall Mounting

Outlet : 3/4" / 1" / 1-1/2 outlet connection For House to accommodate 30/36/40 Mtrs Hoses



THERMOPLASTIC HOSE PIPE (TEXTILE REINFORCED) FOR WATER

TECHNICAL SPECIFICATIONS

IS: 12585 - Type - 1 W.P.6 Kgf /cm2

IS: 12585 - Type - 2 W.P.10 Kgf /cm2

Construction:-
Lining : A flexible Thermoplasti Lining, Smooth in bore.
Reinforcement : A Natural or Synthetic Textile Reinforcement : A flexible thermoplastics cover, which may have a smooth or fluted.
Normal Bore (ID) : 10.00 mm to 50.00 mm
Application : This Hose is used for water deliver & Fire Fighting purpose.



MS Cabinet

CABINET

Fibre Cabinet





COOL CP HOSE



CONTROLLED PERCOLATING HOSE

Hose : Conforming to IS : 8423/1994,

Application : This hose used for water delivery purpose in fire-Fighting irrigation & floor washing etc.

Jacket : Circular woven jacket made from a special synthetic yarn.

Rubber Lining : An ultra thin layer of rubber lining with suitable rubber compound which ensure controlled percolation.

Standard Lengthh : 7.5 Mtrs, 15 Mtrs, 22.5 Mtrs & 30 Mtrs.

End Connection : As per customer requirements

INSTANTANEOUS MALE / FEMALE TYPE COUPLING

TECHNICAL SPECIFICATIONS

Size : 63mm

Material : Stainless Steel / Gun Metal / Aluminum Alloy
Conforming Specification : IS 9003:1993

Performance Test :-

Hydrostatic Test : Tested at 21 Kgf/cm²

Finish : Natural Polished

Hologram : Sticker stuck on Coupling.



Stainless Steel



Gun Metal



Aluminum

RRL HOSE

(Reinforced Rubber Lined Hose)

NON PERCOLATING FLEXIBLE DELIVERY HOSE

Conforming to IS : 636/1988 Type-A

Application : This RRL Hose used for water delivery purpose in Fire-Fighting & Civil Engineering Applications etc.

Jacket : Circular woven jacket made from a special blend of cotton & synthetic yarn with high abrasion and heat resistance Jacket is also treated with suitable rot proofing agent.



XTRA COAT RRL HOSE

(Reinforced Rubber Lined Hose)

NON PERCOLATING FLEXIBLE DELIVERY HOSE

TECHNICAL SPECIFICATIONS

Hose : RRL Hose with Elastomeric Coating conforming to As per IS : 636/1988 Type-A

Application : This RRL Hose is used for water delivery purpose in Fire Fighting, Oil & Power Sector, Industrial Plant, & Sailing Vessels.





OBLIQUE TYPE LANDING VALVE



Gun Metal

Stainless Steel

Aluminum

(Type 'A')

Technical Specifications

Size : 63mm

Inlet : 80mm NB Flanged

Outlet : Female Instantaneous

Conforming Specification : IS: 5290:1993

Performance Test

- Hydraulic Test : 21Kgf/cm²
- Water Tightness Test : 15Kgf/cm²
- Flow Test : 900 LPM at 7 kgf/cm²

DOUBLE OUTLET LANDING VALVE

(Type 'B')

TECHNICAL SPECIFICATIONS

Size : 63mm

Inlet : 100mm NB Flanged


Outlet : Female Instantaneous

Material : Gun Metal/ Stainless Steel

Conforming Specification : IS: 5290:1993

Performance Test

- Hydraulic Test : 21Kgf/cm²
- Water Tightness Test : 14Kgf/cm²
- Flow Test : 1800 LPM at 7 kgf/cm²

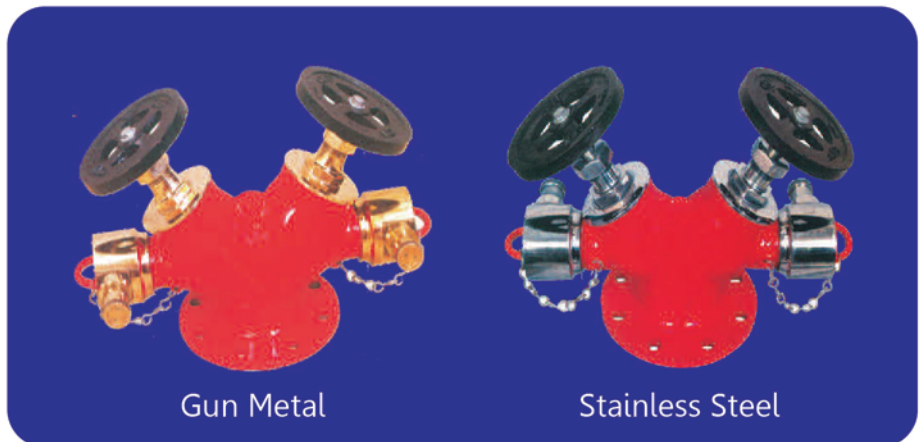

Gun Metal

Stainless Steel

SHORT BRANCH PIPE WITH NOZZLE

TECHNICAL SPECIFICATIONS

Size of Branch Pipe : 63mm

Size of Nozzles : 6mm, 12mm, 15mm, 20mm and 25mm

Material : Gun metal / Stainless/Aluminium Alloy

Conforming Specification : IS 903:1993



Stainless Steel



Gun Metal



Aluminum

INLET FBC BREECING



2 Way Inlet
FBC Breecing



3 Way Inlet
FBC Breecing



4 Way Inlet
FBC Breecing



CARBON DI-OXIDE PORTABLE & FIRE EXTINGUISHERS



TYPE 'B'
FOR USE ON PETROL,
OIL PAINTS, SPIRIT,
CHEMICALS ETC.



TYPE 'C'
FOR USE ON COOKING
& WELDING GAS,
ELECTRICAL FIRE ETC.



TECHNICAL SPECIFICATION						
FIRE EXTINGUISHER CAPACITY	2kg.Wheel	3kg.Wheel	4.5kg.Wheel	2kg.Squeeze	3kg.Squeeze	4.5kg.Squeeze
MINIMUM PERIOD FOR WHICH THROW OF JET MAINTAINED	8 sec	8 sec	8 sec	8 sec	8 sec	8 sec
MINIMUM PERIOD TO DISCHARGE ATLEAST 90% OF CONTESTS	10 sec	16 sec	20 sec	10 sec	16 sec	25 sec
RANGE OF JET	1 mtr.	1 mtr.	2 mtr.	1 mtr.	1 mtr.	2 mtr.
EMPTY. WT. (APPROX)	6.2kg.	9.5kg.	12.5kg.	6.2kg.	9.5kg.	12.5kg.
FULL WT. (APPROX)	8.2kg.	12.5kg.	17kg.	8.2kg.	12.5kg.	17kg.
FIRE RATING	8B	13B	21B	13B	21B	21B
WORKING PRESSURE	60KGF/CM ²	60KGF/CM ²	60KGF/CM ²	60KGF/CM ²	60KGF/CM ²	60KGF/CM ²
HYDRO PRESSURE	250KGF/CM ²	250KGF/CM ²	250KGF/CM ²	250KGF/CM ²	250KGF/CM ²	250KGF/CM ²
BRUSTING PRESSURE	600KGF/CM ²	600KGF/CM ²	600KGF/CM ²	600KGF/CM ²	600KGF/CM ²	600KGF/CM ²

CLEAN AGENT (STORED PRESSURE TYPE)

TECHNICAL SPECIFICATION			
Capacity	2 Kgs.	4 Kgs.	6 Kgs.
Confirming IS No.	15683	15683	15683
Fire Rating	1A-8B	1A-13B	2A-21B
Operating Temperature	-200C TO +550C	-300C TO +550C	-300C TO +550C
Min. Jet Length (in mtrs)	2 Mtrs.	2 Mtrs.	2 Mtrs.
Discharge Percentage Min.	95%	95%	95%
Discharge Time Min.	13 Seconds	13 Seconds	13 Seconds
Charge Pressure	15 Kgf / cm ²	15 Kgf / cm ²	15 Kgf / cm ²
Test Pressure	35 Kgf / cm ²	35 Kgf / cm ²	35 Kgf / cm ²
Operating Valves	Squeeze Grip Type	Squeeze Grip Type	Squeeze Grip Type
Extinguisher Media	HFC 236fa	HFC 236fa	HFC 236fa
Expellant	Dry Nitrogen	Dry Nitrogen	Dry Nitrogen
Anti Corrosive Treatment	Phosphating (7 Tanks)	Phosphating (7 Tanks)	Phosphating (7 Tanks)
Painting	Epoxy Polyester Powder Coating	Epoxy Polyester Powder Coating	Epoxy Polyester Powder Coating
Tare Weight (Approx.)	1.4 Kgs.	2.3 Kgs.	3 Kgs.
Gross Weight (Approx.)	3.4 Kgs.	6.3 Kgs.	9 Kgs.





OUR WIDE RANGE



Admin Office:

6/4, Navarathna Flats, Mogappiar East, Seethakadhi Salai, Chennai - 600 037.

📍 Landmark (Opposite to Water Tank) ☎ +91 95000 74340 ✉ admin@circlessafety.com

No 7, Nakkiran Street, Periyar nagar, Pallikaranai, Chennai - 600 100.

Landmark (Om Sakthi Temple) ☎ +91 95000 36359

✉ mohandoss@circlessafety.com 🌐 www.circlessafety.com